

# CPV/EC

Single inlet anti-corrosive centrifugal fans made of polypropylene, with EC Technology IE5 motor



EC TECHNOLOGY MOTOR with integrated electronics



EC CONTROL Supplied as an optional accessory

Single inlet anti-corrosive centrifugal fans made of polypropylene, equipped with EC Technology IE5 motor with integrated electronics, specially designed for high energy efficiency.

**Fan:**

- Polypropylene casing.
- Forward curved impeller in polypropylene.
- Maximum temperature of air to be carried: -25 °C +70 °C.

**Motor:**

- High efficiency EC Technology motors with integrated electronics, regulated by 0-10 V or 4-20 mA.
- IE5 efficiency motors, class F and IP55 protection.
- Single-phase 230 V 50/60 Hz.
- Working temperature: -25 °C +60 °C.

EC CONTROL: Supplied as an optional accessory. Control panel for ventilation systems with EC Technology motors with the electronics integrated in the motor itself. With the following characteristics:

- CPC: Constant pressure control.
- CFC: Constant flow control.
- DAY / NIGHT: Double pressure setpoint adjustment according to time of day.
- External sensor: compatible with temperature, humidity, air quality or CO sensor.
- Equipment preconfigured in constant pressure mode with 100 Pa set point.

**Finish:**

- Anti-corrosive in plastic material.

## Order code

**CPV/EC – 825 – 2M – 1.5 – IE5**

CPV/EC: Single inlet anti-corrosive centrifugal fans made of polypropylene, with EC Technology IE5 motor

Impeller size

Number of motor poles  
 2=2900 r/min 50 Hz  
 4=1400 r/min 50 Hz  
 6=900 r/min 50 Hz

T = Three-phase  
 M = Single-phase

Motor power (HP)

IE5 motor

## Technical characteristics

Model	Speed	Maximum admissible current (A) 230V	Max. electric power (kW)	Maximum flow rate (m³/h)	Sound pressure level dB (A)	Approx. weight (Kg)	According ErP*
	(r/min)						
CPV/EC-825-2M-1.5 IE5	2830	8.7	1.10	1140	79	18	2020
CPV/EC-1020-2M-1 IE5	2825	5.9	0.75	2000	81	25	2020
CPV/EC-1020-4M-0.33 IE5	1350	2.3	0.25	1250	65	20	2020
CPV/EC-1325-4M-0.5 IE5	1370	3.4	0.37	2300	69	27	2020
CPV/EC-1630-6M-1 IE5	900	5.9	0.75	2700	63	35	2020

\* In accordance with the ErP 2020 draft



## Erp. (Energy Related Products)

Information on Directive 2009/125/EC can be downloaded from the SODECA website or the QuickFan selector programme.


### Acoustic characteristics

The indicated values are determined by measuring the sound pressure level and sound power in dB(A) obtained in a free field at a distance equivalent to twice the size of the fan plus the impeller diameter, with a minimum of 1.5 m.

Sound power spectrum Lw(A) in dB(A) per Hz frequency band

	63	125	250	500	1000	2000	4000	8000
CPV/EC-825-2M-1.5	60	73	81	85	85	81	77	69
CPV/EC-1020-2M-1	62	75	83	87	87	83	79	71
CPV/EC-1020-4M-0.33	46	59	67	71	71	67	63	55
CPV/EC-1325-4M-0.5	52	65	73	77	78	74	70	61
CPV/EC-1630-6M-1	48	61	69	73	74	70	66	57

### Dimensions mm

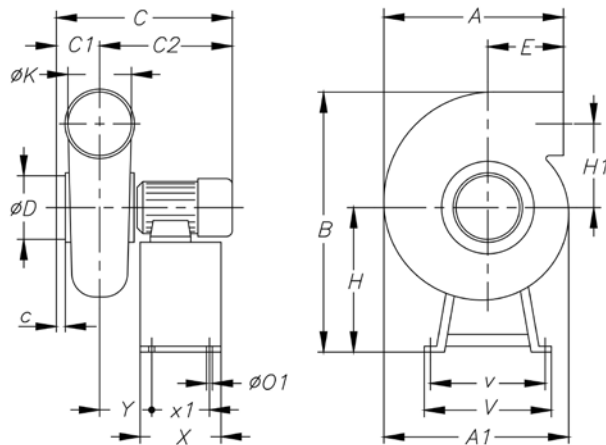


	A	A1	B	C	C1	C2	c	øD	E	H	H1	øK	øO1	V	v	X	x1	Y
CPV/EC-825-2M	445	-	552	454	110	344	55	125	218	320	170	125	6	340	320	180	160	103
CPV/EC-1020-2M	340	397	593	458.5	116	342.5	32	160	100	290	223	160	8	355	335	180	160	127.5
CPV/EC-1020-4M	340	397	584	418.5	116	302.5	32	160	100	281	223	160	8	355	335	180	160	122.5
CPV/EC-1325-4M	413	505	716	460	130	330	35	200	103	351	265	200	8	400	380	180	160	113.5
CPV/EC-1630-6M	480	602	880	538	145	393	35	250	117	430	323	250	8	450	430	240	220	138

## Characteristic curves


Q= Flow rate in m<sup>3</sup>/h, m<sup>3</sup>/s and cfm

Pe= Static pressure in mm H<sub>2</sub>O, Pa and inwg

### CPV/EC-825-2M-1.5

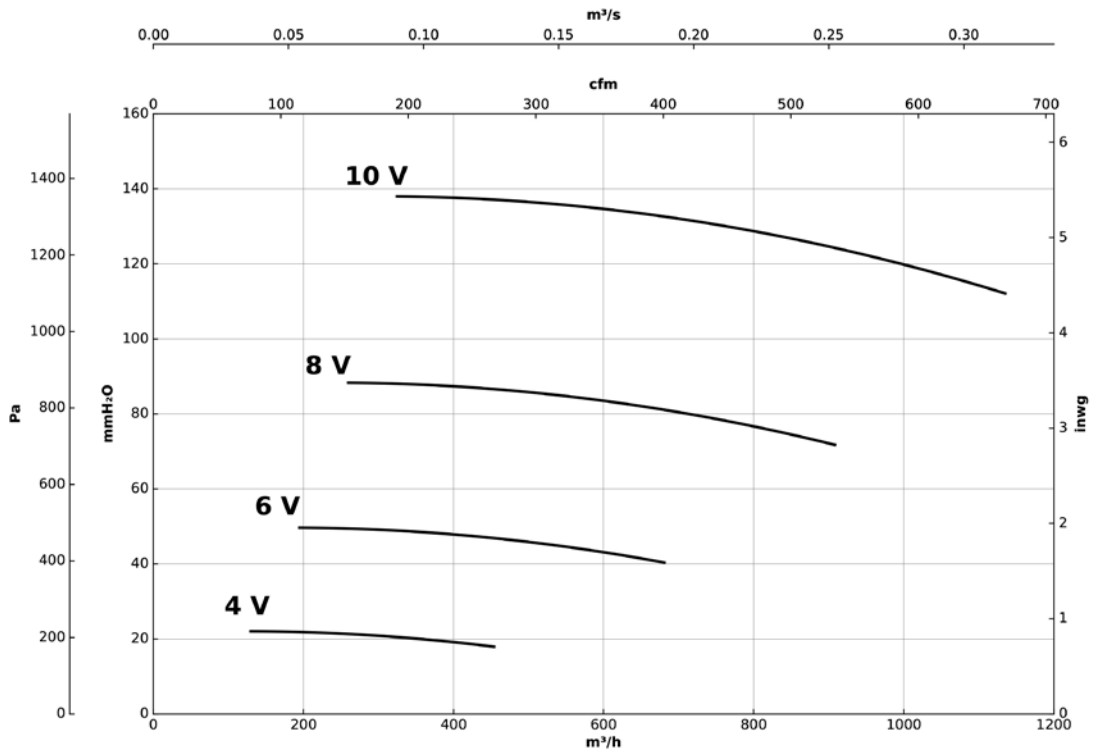

### CPV/EC-1020-2M-1

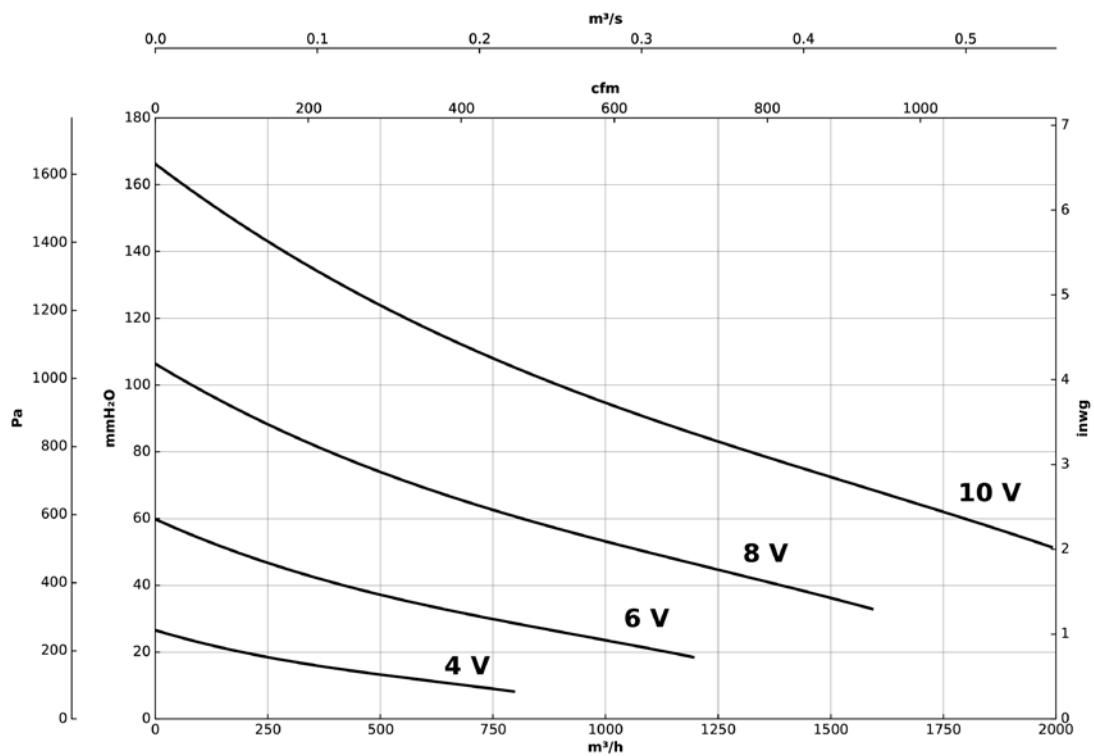


### Characteristic curves


Q= Flow rate in m<sup>3</sup>/h, m<sup>3</sup>/s and cfm

Pe= Static pressure in mm H<sub>2</sub>O, Pa and inwg

**CPV/EC-1020-4M-0.33**

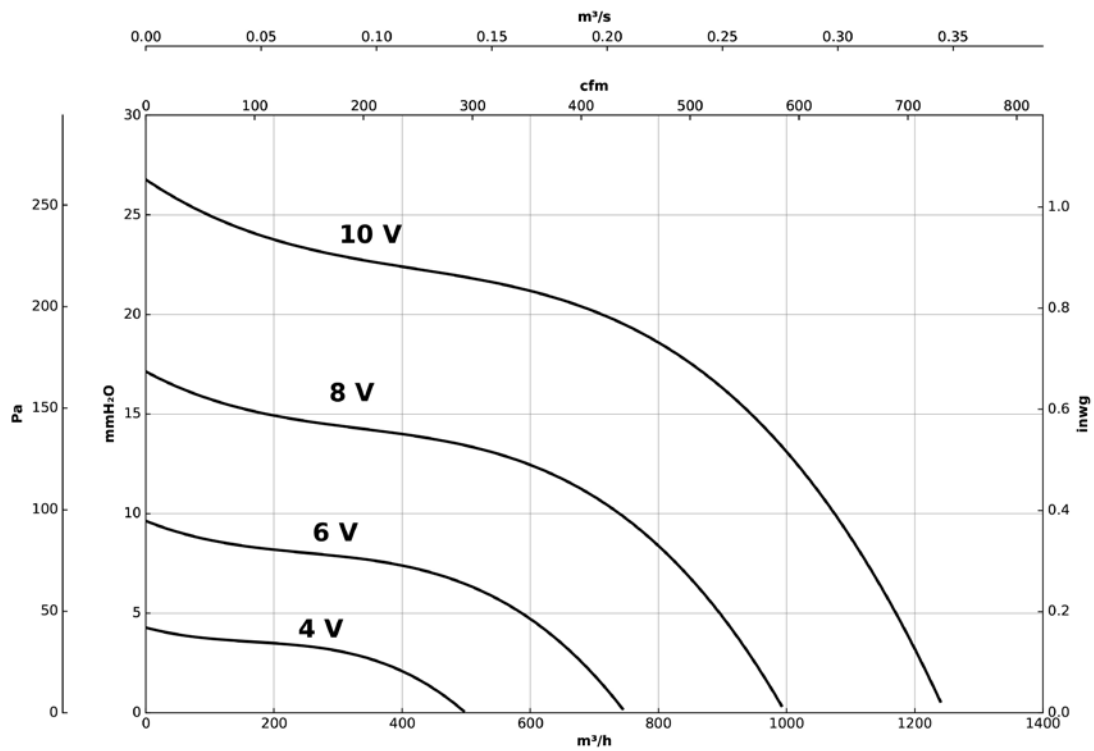


**CPV/EC-1325-4M-0.5**

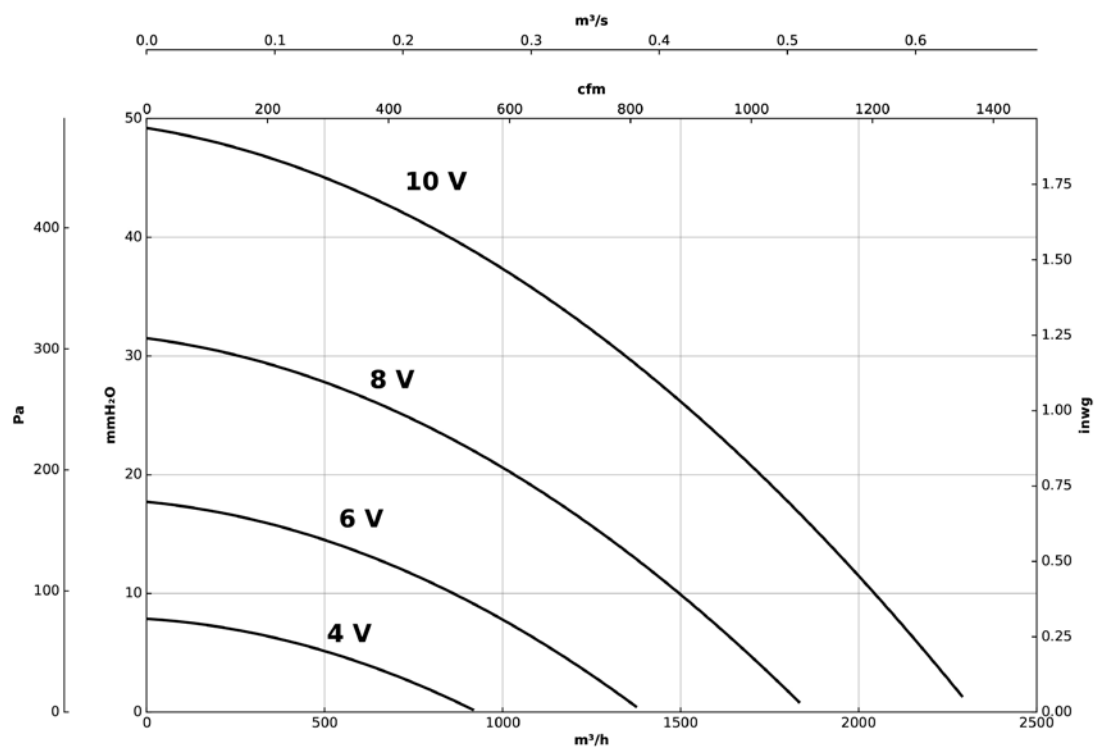

## Characteristic curves

Q= Flow rate in m<sup>3</sup>/h, m<sup>3</sup>/s and cfm

Pe= Static pressure in mm H<sub>2</sub>O, Pa and inwg

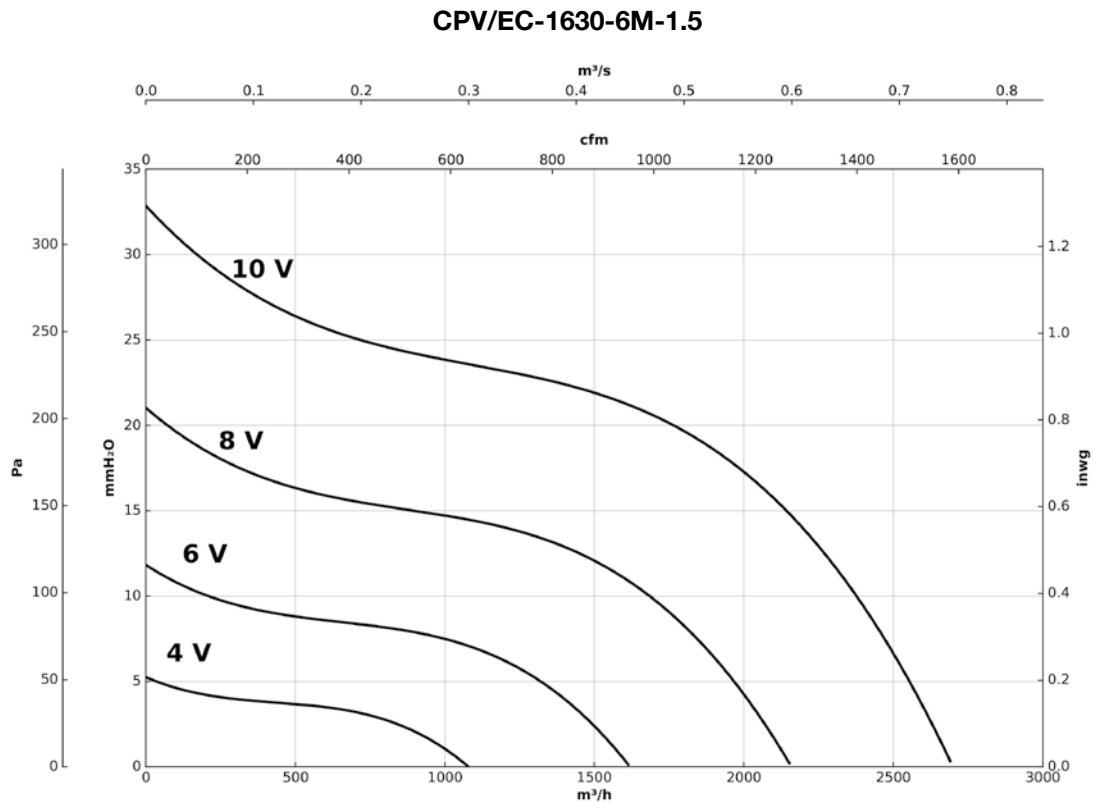

## Accessories

