

# CVT

400 °C/2h centrifugal roof fans with vertical air outlet, aluminum hood



## Fan:

- Support base in galvanized steel sheet.
- Backward curved impeller made of galvanized sheet steel.
- Bird protection grid.
- Aluminum rain cover.
- Approved in accordance with standard EN 12101-3, with certificate no.: 0370-CPR-1892.
- Maximum temperature of air to be carried: -25 °C +120 °C.

- Class F motors with ball bearings. IP55 protection. Except single-phase models, with IP54 protection. 1 or 2 speeds depending on model.
- Single-phase 230 V 50 Hz and three-phase 230/400 V 50 Hz.
- Working temperature: -25 °C +50 °C.

## Finish:

- Anti-corrosive in galvanized steel sheet and aluminum.

## Motor:

- Motors with IE3 efficiency for powers equal to or greater than 0.75 kW, except single-phase, 2-speed and 8-pole.

## On request:

- Special windings for different voltages.
- ATEX certified Category 3.

## Order code

| CVT                                                                          | — | 200           | — | 4T                                                               | —                                   | BS                                                                |
|------------------------------------------------------------------------------|---|---------------|---|------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------------------|
| CVT: 400 °C/2h centrifugal roof fans with vertical air outlet, aluminum hood |   | Impeller size |   | Number of motor poles<br>4=1400 r/min 50 Hz<br>6=900 r/min 50 Hz | M = Single-phase<br>T = Three-phase | BS: Raised support base<br>BSS: Raised support base with silencer |

## Technical characteristics

| Model          | Speed<br>(r/min) | Maximum admissible current (A) |      | Installed power<br>(kW) | Maximum flow rate<br>(m³/h) | Sound pressure level¹<br>dB (A) |         | Approx. weight<br>(Kg) |
|----------------|------------------|--------------------------------|------|-------------------------|-----------------------------|---------------------------------|---------|------------------------|
|                |                  | 230V                           | 400V |                         |                             | Inlet                           | Exhaust |                        |
| CVT-200-4T     | 1350             | 1.66                           | 0.96 | 0.25                    | 1450                        | 36                              | 43      | 25                     |
| CVT-200-4M     | 1380             | 1.70                           |      | 0.25                    | 1450                        | 36                              | 43      | 25                     |
| CVT-225-4T     | 1350             | 1.66                           | 0.96 | 0.25                    | 2100                        | 40                              | 46      | 25                     |
| CVT-225-4M     | 1380             | 2.60                           |      | 0.25                    | 2100                        | 40                              | 46      | 25                     |
| CVT-250-4T     | 1350             | 1.66                           | 0.96 | 0.25                    | 3100                        | 44                              | 49      | 34                     |
| CVT-250-4M     | 1380             | 2.60                           |      | 0.25                    | 3100                        | 44                              | 49      | 34                     |
| CVT-315-4T     | 1380             | 2.92                           | 1.69 | 0.55                    | 4950                        | 47                              | 53      | 39                     |
| CVT-315-4M     | 1380             | 3.30                           |      | 0.55                    | 4950                        | 47                              | 53      | 39                     |
| CVT-400-4T IE3 | 1420             | 2.82                           | 1.62 | 0.75                    | 7000                        | 54                              | 60      | 58                     |
| CVT-400-4M     | 1380             | 4.40                           |      | 0.75                    | 7000                        | 54                              | 60      | 57                     |
| CVT-400-6T     | 900              | 2.24                           | 1.30 | 0.37                    | 4500                        | 43                              | 49      | 56                     |
| CVT-450-4T IE3 | 1440             | 5.41                           | 3.11 | 1.50                    | 10200                       | 58                              | 63      | 74                     |
| CVT-450-6T     | 900              | 2.24                           | 1.30 | 0.37                    | 6720                        | 46                              | 53      | 59                     |
| CVT-500-6T IE3 | 945              | 4.68                           | 2.69 | 1.10                    | 12000                       | 50                              | 55      | 109                    |
| CVT-560-6T IE3 | 950              | 9.08                           | 5.22 | 2.20                    | 17300                       | 53                              | 59      | 130                    |
| CVT-630-6T IE3 | 960              | 15.60                          | 8.99 | 4.00                    | 24700                       | 57                              | 61      | 166                    |

¹ Sound pressure level in dB(A) at a distance of 6 m and at maximum flow rate.



## Erp. (Energy Related Products)

Information on Directive 2009/125/EC can be downloaded from the SODECA website or the QuickFan selector programme.

## Acoustic characteristics

Sound power spectrum Lw(A) in dB(A) per Hz frequency band


Values measured at inlet with maximum flow rate (Qmax)

|           | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
|-----------|----|-----|-----|-----|------|------|------|------|
| CVT-200-4 | 37 | 43  | 54  | 57  | 58   | 54   | 52   | 46   |
| CVT-225-4 | 44 | 53  | 58  | 58  | 62   | 61   | 54   | 48   |
| CVT-250-4 | 48 | 57  | 62  | 62  | 66   | 65   | 58   | 52   |
| CVT-315-4 | 52 | 58  | 64  | 64  | 67   | 70   | 61   | 55   |
| CVT-400-4 | 59 | 65  | 71  | 71  | 74   | 77   | 68   | 62   |
| CVT-400-6 | 48 | 54  | 60  | 60  | 63   | 66   | 57   | 51   |
| CVT-450-4 | 64 | 71  | 76  | 76  | 80   | 79   | 72   | 67   |
| CVT-450-6 | 52 | 59  | 64  | 64  | 68   | 67   | 60   | 55   |
| CVT-500-6 | 56 | 62  | 67  | 68  | 72   | 71   | 64   | 57   |
| CVT-560-6 | 59 | 65  | 70  | 71  | 75   | 74   | 67   | 60   |
| CVT-630-6 | 63 | 69  | 74  | 75  | 79   | 78   | 71   | 64   |

Values measured at exhaust with maximum flow rate (Qmax)

|           | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |
|-----------|----|-----|-----|-----|------|------|------|------|
| CVT-200-4 | 41 | 46  | 60  | 62  | 63   | 63   | 58   | 53   |
| CVT-225-4 | 43 | 52  | 62  | 66  | 69   | 66   | 59   | 53   |
| CVT-250-4 | 46 | 55  | 65  | 69  | 72   | 69   | 62   | 56   |
| CVT-315-4 | 51 | 63  | 71  | 73  | 74   | 74   | 66   | 58   |
| CVT-400-4 | 58 | 70  | 78  | 80  | 81   | 81   | 73   | 65   |
| CVT-400-6 | 47 | 59  | 67  | 69  | 70   | 70   | 62   | 54   |
| CVT-450-4 | 62 | 74  | 82  | 84  | 85   | 82   | 75   | 67   |
| CVT-450-6 | 52 | 64  | 72  | 74  | 75   | 72   | 65   | 57   |
| CVT-500-6 | 52 | 66  | 74  | 78  | 77   | 74   | 68   | 62   |
| CVT-560-6 | 56 | 70  | 78  | 82  | 81   | 78   | 72   | 66   |
| CVT-630-6 | 59 | 73  | 81  | 85  | 74   | 81   | 75   | 69   |

## Dimensions mm

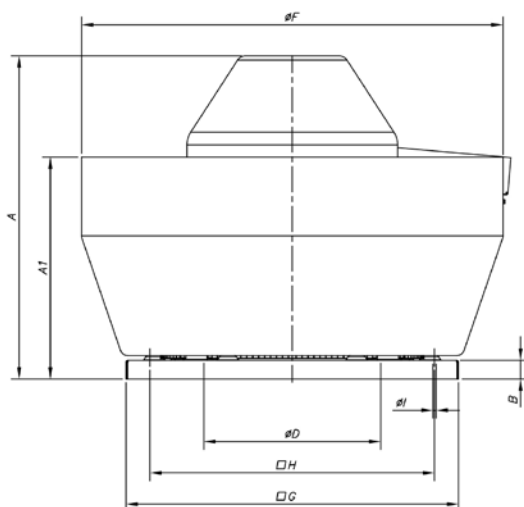

|         | A    | A1  | B  | øD* | øF   | G    | H   | øl |
|---------|------|-----|----|-----|------|------|-----|----|
| CVT-200 | 472  | 296 | 20 | 250 | 530  | 450  | 360 | 12 |
| CVT-225 | 490  | 296 | 20 | 250 | 530  | 450  | 360 | 12 |
| CVT-250 | 562  | 248 | 30 | 355 | 700  | 560  | 450 | 12 |
| CVT-315 | 612  | 373 | 30 | 355 | 700  | 560  | 450 | 12 |
| CVT-400 | 689  | 473 | 40 | 500 | 900  | 710  | 590 | 12 |
| CVT-450 | 705  | 474 | 40 | 500 | 900  | 710  | 590 | 12 |
| CVT-500 | 772  | 545 | 40 | 630 | 1100 | 900  | 750 | 14 |
| CVT-560 | 957  | 678 | 40 | 710 | 1295 | 1100 | 900 | 14 |
| CVT-630 | 1017 | 676 | 40 | 710 | 1295 | 1100 | 900 | 14 |


\* Recommended nominal tube diameter

## Characteristic curves


Q= Flow rate in m<sup>3</sup>/h, m<sup>3</sup>/s and cfm

Pe= Static pressure in mm H<sub>2</sub>O, Pa and inwg

**4M/4T=1500 r/min**

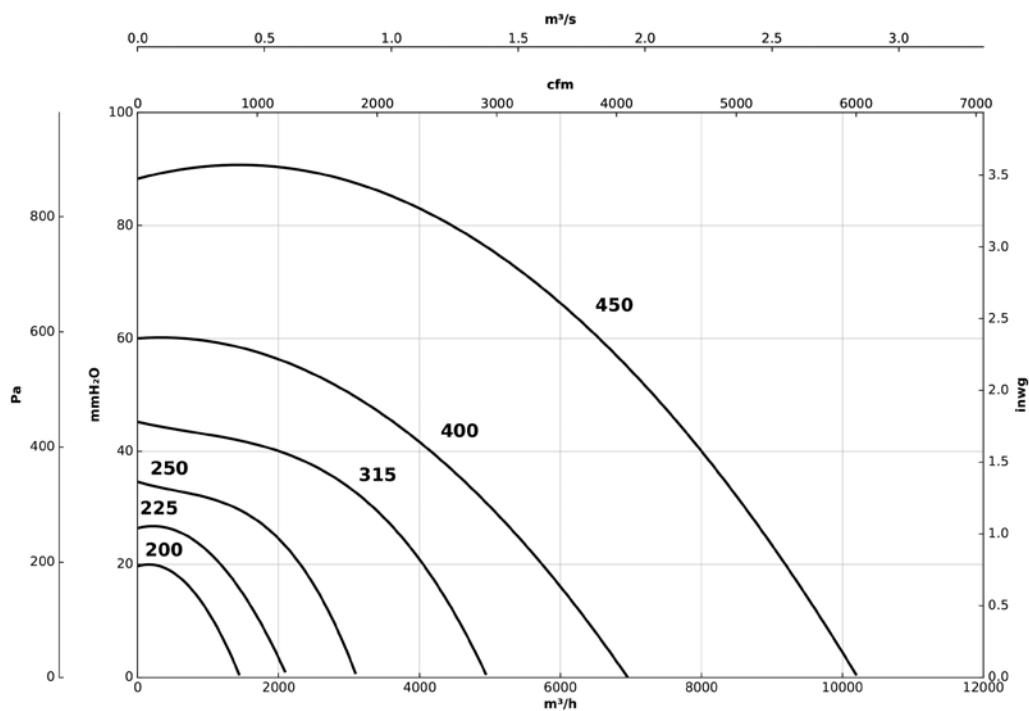


**6T=1000 r/min**

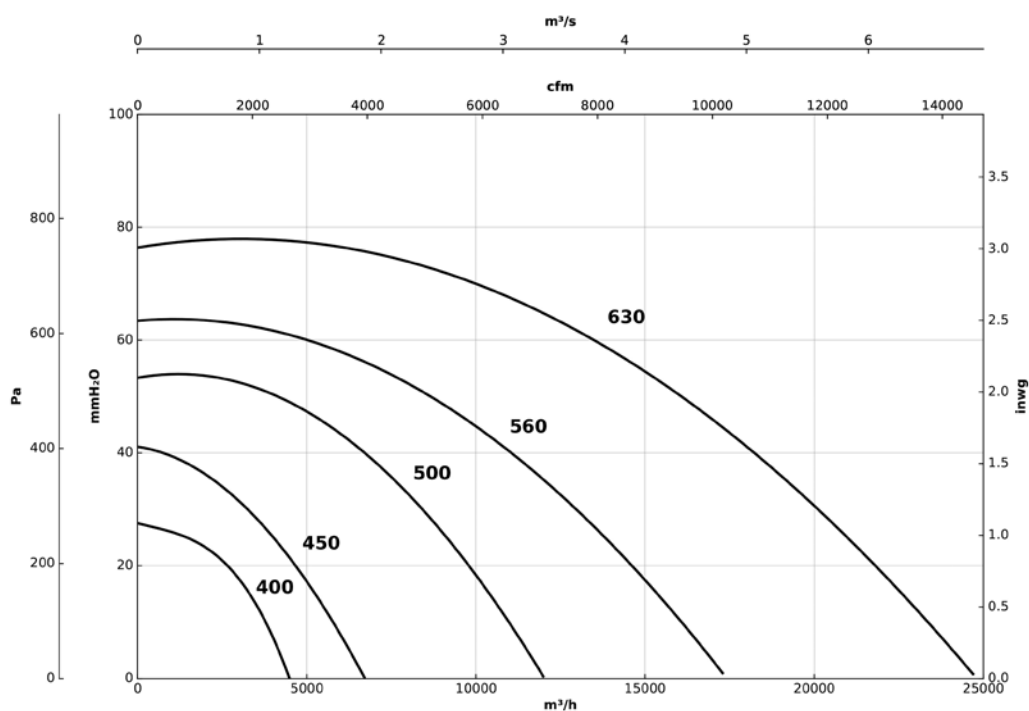

## Sound pressure variation depending on distance

The noise level may vary depending on the roof or tile structure.

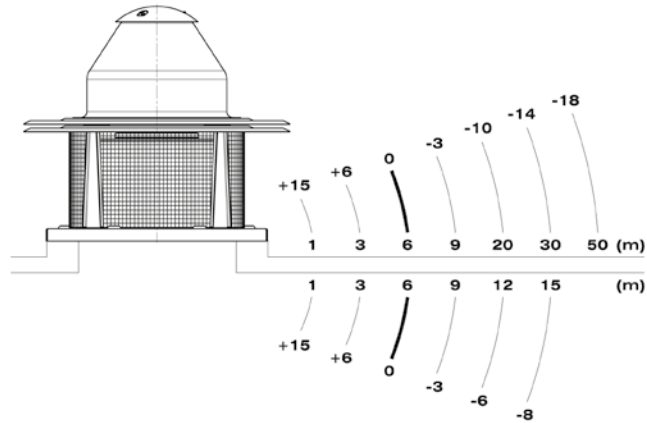


## Application example

Extract fans suitable for use in industrial kitchens

For the correct application of standard:

- C.T.E. Código Técnico de la Edificación (Technical Building Code). Basic Document SI on fire safety. Basic Document HS on health and safety.

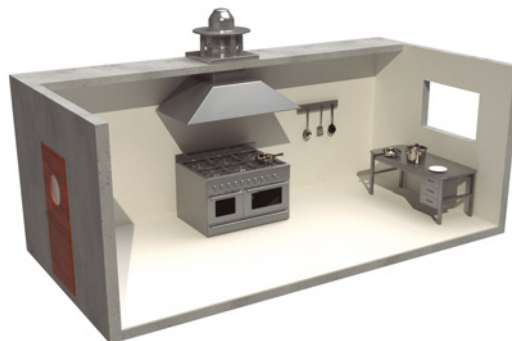

## Accessories



INT



C2V



RM




VSD3/A-RFT  
- VSD1/A-RFM



B



BAC



MS



PA



BS



BSS



PT



S



SI-PIR



SI-TEMP+HUMEDAD



SI-PRESIÓN



SI-FUENTE DE ALIMENTACIÓN



SI-VENT



SI-PRESOSTATO